


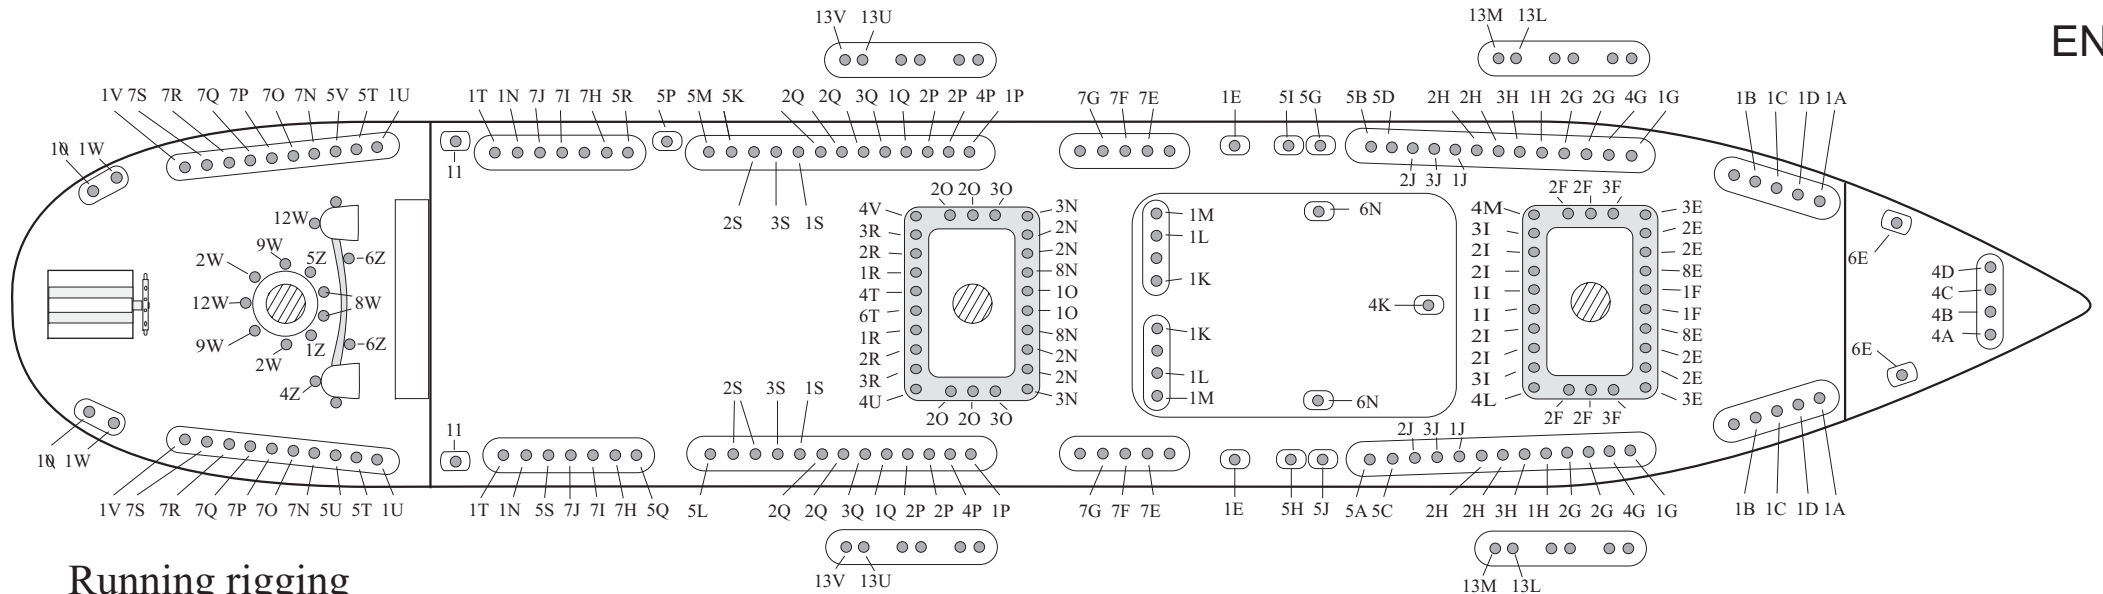


Running rigging

1. Sheet to set a sail properly to the wind.
2. Buntline to bring the foot of a square sail up to its yard.
3. Clewline to bring the lower corner of a square sail up to the yard.
4. Downhaul to haul a sail down.
5. Halyard to hoist sails or yards.
6. Tack to bring the lower corner of the sail down when setting sail.
7. Brace to bring the yards around.
8. Toppinglift to control a yard or boom in a vertical position.
9. Outhaul to stretch the mizzen-sail along the boom or gaff.
10. Gaffpreventer to control the gaff in a horizontal plane.
11. Boomstop to control the mizzen boom in a horizontal plane.
12. Purchase extra tackle for the outhaul (9).
13. Tricing line to keep the lazy sheet from chafing.

Names of the sails

- | | | | |
|----|--------------------------|----|----------------------------|
| A. | Flying jib | M. | Main royal staysail |
| B. | Outer jib | N. | Main sail / main course |
| C. | Inner jib | O. | Main lower topsail |
| D. | Fore topmast staysail | P. | Main upper topsail |
| E. | Foresail / forecourse | Q. | Main topgallant |
| F. | Fore lower topsail | R. | Main royal |
| G. | Fore upper topsail | S. | Main skysail |
| H. | Fore topgallant | T. | Mizzen staysail |
| I. | Fore royal | U. | Mizzen top staysail |
| J. | Fore skysail | V. | Mizzen topgallant staysail |
| K. | Main topmast staysail | W. | Mizzen |
| L. | Main topgallant staysail | Z. | Gaff topsail |

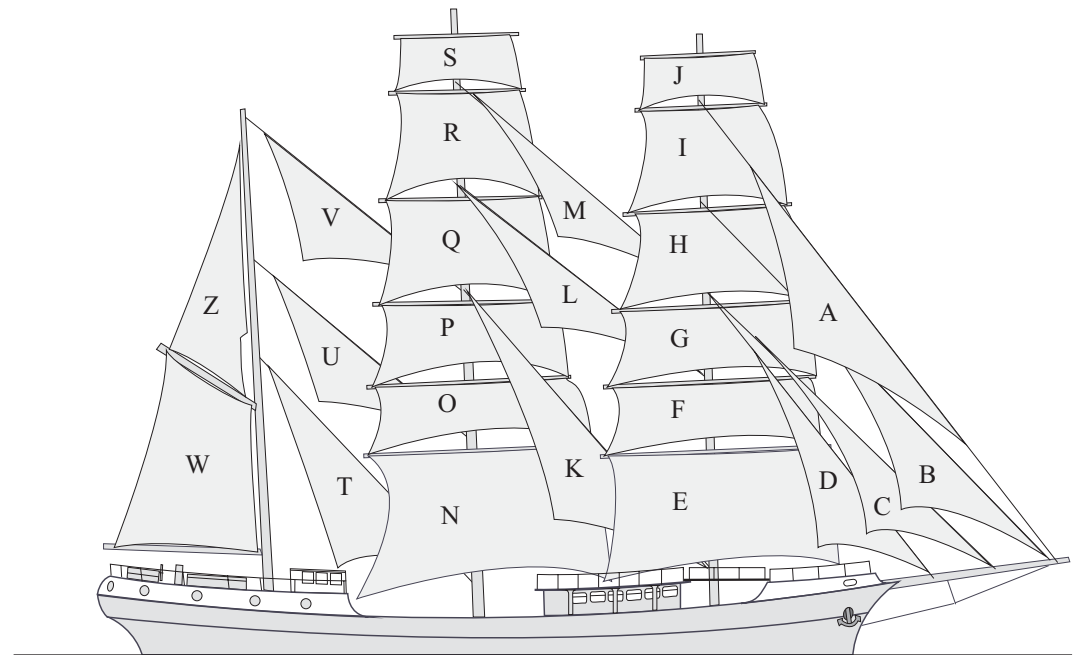

Barque "EUROPA"

Pinrail diagram